

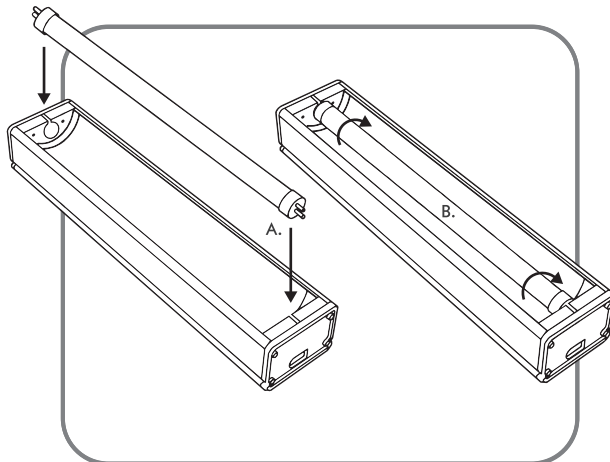


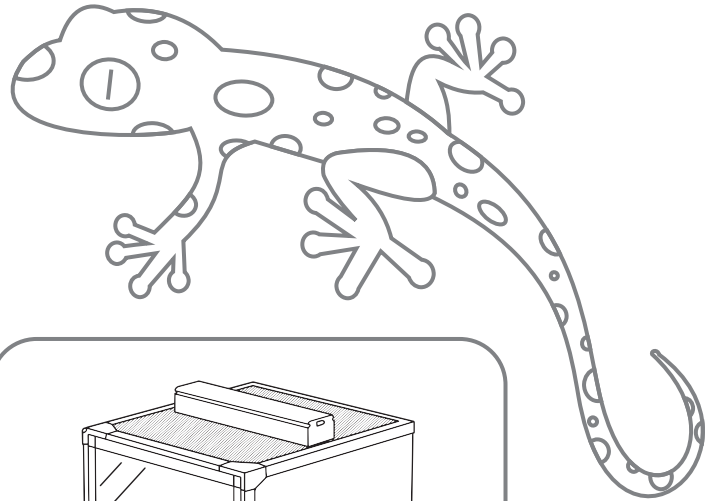


T5 UV Light Fixture

Our T5 Fluorescent Light Bar allows you to use T5 HO UVB bulbs to provide the necessary UV Light to your reptiles, keeping your animals healthy and happy!


In the Box

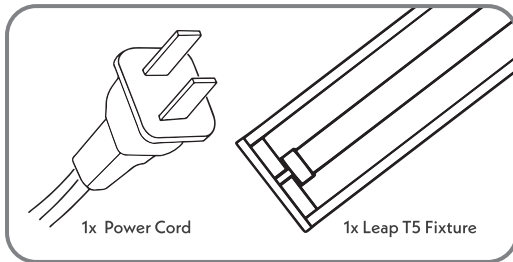


1) Install bulb by inserting prongs fully into the slots on the side walls of the unit. Rotate the bulb to lock it into place.

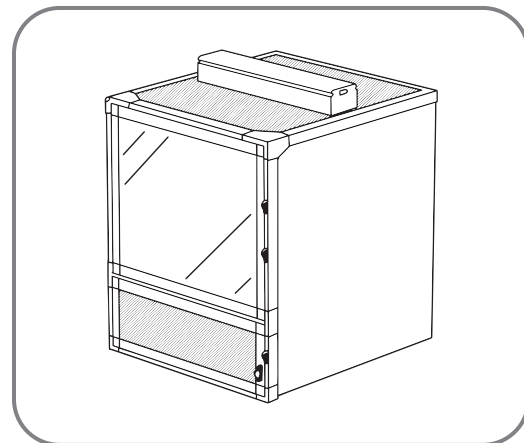

2) Place the fixture in your desired location on top of your habitat. Tip: Adjust fixture location to provide a healthy gradient of UV light for basking.

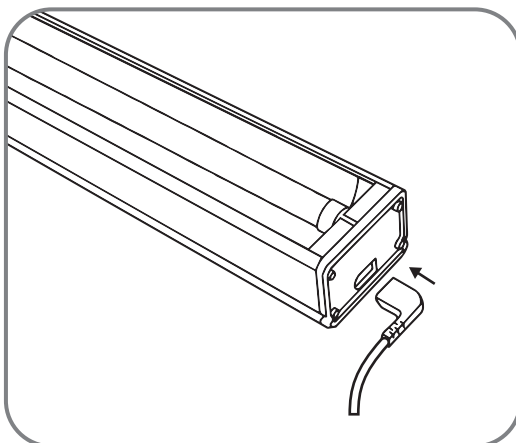

3) Plug the power cord into the light fixture. Make sure the cord is fully seated in the fixture to provide good contact.

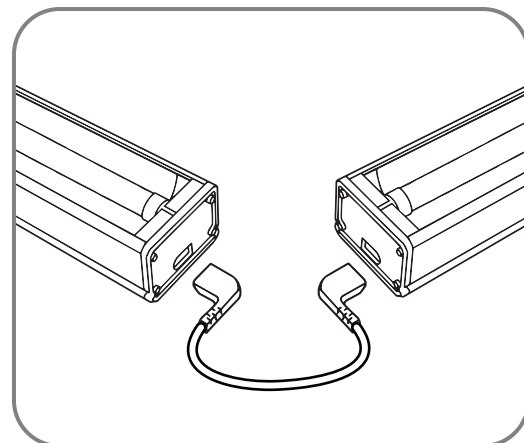

Optional: Chain one or more lights together in series using an interconnect cable accessory. You can link both Leap's T5 UVB fluorescent fixtures and LED bars with the same connecting cord! (sold separately)



<https://leaphabitats.com/>

SAFETY INSTRUCTIONS

Incorrect usage of this device could cause bodily injury or death. Follow all safety guidelines when assembling and using this fixture.

Always read the manual prior to use.

DO NOT immerse the product or power cable in water. If the product or power supply falls into water, DO NOT reach for it! First, unplug it and then retrieve it. If electrical components of the appliance get wet, unplug the appliance immediately. Death, injury, or destruction of property may result.

Do not use the appliance for other than intended use. The use of attachments, power cords, or accessories not sold by the manufacturer may cause an unsafe condition resulting in death, injury, or destruction of property may result.

To avoid possible electrical shock, special care should be taken since water is employed in the use of habitat equipment.

- Always check the power cable for damage or defect before use.
- This product is for indoor use only.
- Make sure the unit is placed on a flat surface and exposed power cables are secured to prevent injury or accidentally disrupting the unit.
- If a plug or receptacle becomes wet, immediately disconnect the fuse or circuit breaker.
- Do not operate any product if it has a damaged cord or plug, if it is malfunctioning, has damaged bulbs, or if it is dropped or damaged in any manner.
- Use of this fixture in a wet environment may result in product damage and bodily injury or death.
- Carefully examine the product after installation. It should not be plugged in if there is water anywhere on the product.
- Never yank the cord to pull the plug from the outlet. Grasp the plug and pull to disconnect.
- Position the habitat and stand to one side of a wall-mounted receptacle to prevent water or moisture from dripping onto the receptacle or plug.
- A "drip-loop" should be employed for each cord connecting a habitat appliance to a receptacle. A "drip-loop" is the part of the cord below the level of the receptacle (or the connector if an extension cord) to prevent water from traveling along the cord coming in contact with the receptacle.
- If an extension cord is necessary, a cord with a proper rating should be used. A cord rated for less amperes or watts than the appliance rating may overheat.
- Always unplug the product from the outlet before putting on or taking off parts and before cleaning.
- This system is intended for use by adults only.
- Do not attempt to disassemble the light fixture.
- In the event that the fixture requires service, please contact Leap Habitats.
- If fixture operation appears abnormal, disconnect from power and contact Leap customer service.

IMPORTANT SAFETY INSTRUCTIONS

This portable luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.


TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF PLUG TO WIDE SLOT

POUR EVITER LES CHOCS ELECTRIQUES, INTRODUIRE LA LAME LA PLUS LARGE DE LA FICHE DANS LA FENTE LA PLUS LARGE

SPECIFICATIONS

UVB PN# for Reorder

Model	Part#	Length	Voltage	F(Hz)	Power(w)	Current(A)	5.0	10.0
Leap 8W T5	LP101	12"	120V	60	8	0.08	LP107	LP108
Leap 8W T5	LP102	12"	220v	50	8	0.04	LP107	LP108
Leap 39W T5	LP103	36"	120v	60	39	0.35	LP109	LP110
Leap 39W T5	LP104	36"	220v	50	39	0.175	LP109	LP110
Leap 54W T5	LP105	46"	120v	60	54	0.49	LP111	LP112
Leap 54W T5	LP106	46"	220v	50	54	0.245	LP111	LP112



Optional: If you plan on using Leap's Lighting in a rack system, you can use Leap's easy-to-use rack mounting kit. (sold separately)



BULB REPLACEMENT

Leap recommends UV bulb replacement annually. Replacement bulbs and lighting information are available at leaphabitats.com or use the QR code.



Conforms to UL STD 153
Certified to CSA STD C22.2#250.4



<https://leaphabitats.com/>